


KOS.p

- Corpo in alluminio estruso 6060 T5.
- Anello in alluminio pressofuso a elevata resistenza all'ossidazione (EN AB44300).
- Controcassa in policarbonato V1 (850°C).
- Diffusore in vetro trasparente temperato 5 mm.
- Viti di chiusura in acciaio inox A4.
- Verniciatura a polveri di poliestere certificate Qualicoat previo trattamento di sabbiatura e passivazione esente da cromo.
- Guarnizione in gomma ai siliconi.
- Lampada esclusa (eccetto le versioni led).
- IP67, resistenza all'urto IK08.
- Isolamento in Classe II.
- Omologazione CE.

- *Extruded aluminium body 6060 T5.*
- *Die-cast aluminium ring with high oxidation resistance (EN AB44300).*
- *Junction box in polycarbonate V1 (850°C).*
- *Tempered glass diffuser of 5 mm transparent.*
- *Closing screws in stainless steel A4.*
- *Painted with polyester powders previous treatment of sandblast process and hexavalent chrome free passivation.*
- *Silicone rubber gasket.*
- *Lamp not included (except led versions).*
- *IP67, IK08 shock resistance.*
- *Class II insulation.*
- *CE omologations.*

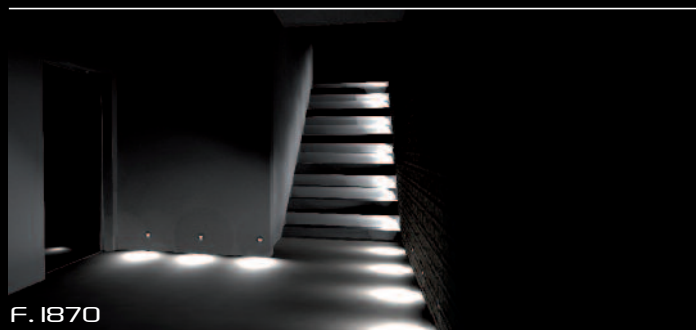

F. 1870




F. 1873







- Passacavo in ottone nichelato M12 pre-cablato con 1 mt di cavo doppio isolato.
- Rubber for cable entry in nickel brass M12, assembled before with 1 mt of cable double insulation.

- Parabola in alluminio lucido puro al 99,85%.
- Bright aluminium reflector pure at 99,85%.

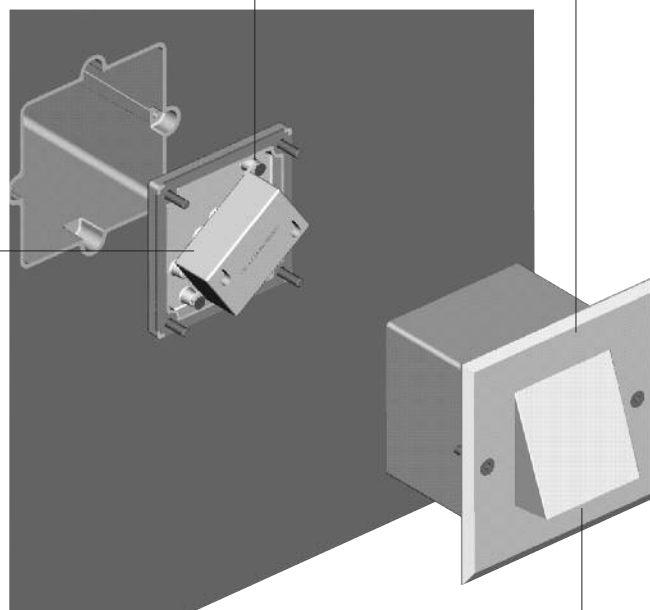


- Alimentatore elettronico 220-240V 50/60Hz.
- Electronic ballast 220-240V 50/60Hz.


- Vetro temperato spessore 5 mm.
- Tempered glass with thickness of 5 mm.

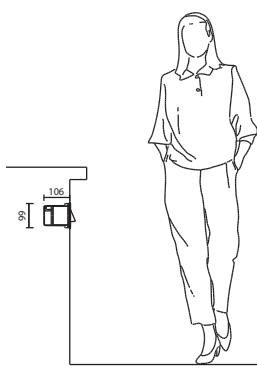

- Fascio emesso inferiore ai 90°.
- Issued light beam less than 90°.



- Applicazione incasso a pavimento.
- Installation for recessed in the floor.



- Parabola esterna in alluminio puro al 99,85%.
- External pure aluminium reflector at 99,85%.

Codici varianti da aggiungere ai codici prodotto
Options to be add. to product codes



- .1** Antracite.
Anthracite.
- .4** Grigio metallizzato.
Grey metallized.
- .8** Corten



- .28** Led bianco.
White led.
(3150°K bin KO).
- .30** Led blu.
Led blue.

Accessori
Accessories






- F64** Volume a perdere
in polistirolo.
Polystyren
volume to lose.



F. 1870

- **3 led - 4,5w**
180 lumen - 6700°K binXO
- Alimentatore elettronico incluso
Included electronic ballast




IP67 **IK08**



F. 1872

- **QPAR-CB16-35W GU10**
600 cd

IP67 **IK08**



F. 1873

- **QR-CBC51/24° 35W GU5,3**
2200 cd

IP67 **IK08**

